
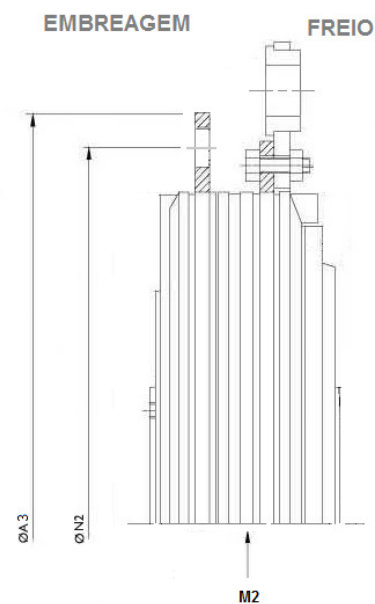
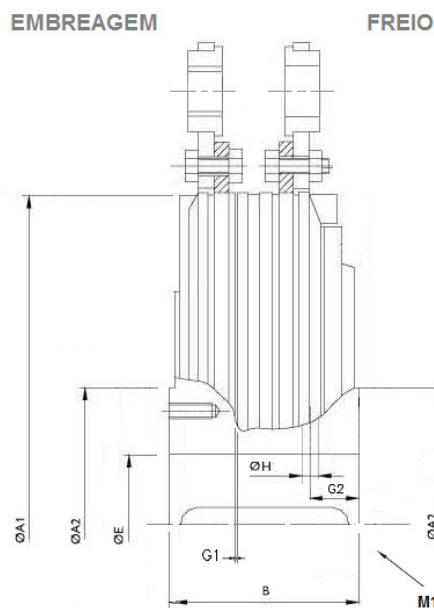


EMBREGEM E FREIO –

SÉRIE WEFI / CT CONJUGADO PNEUMÁTICO

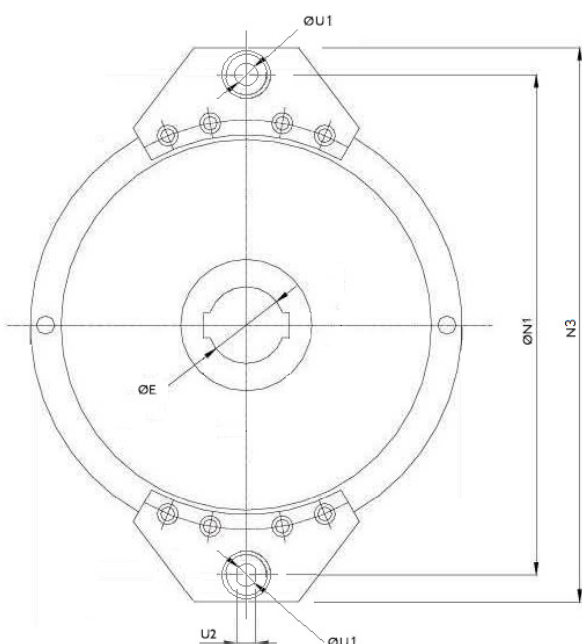

| Tamanho | Torque Embreagem (Nm) | Torque Freio (Nm) | Rot. Max. (RPM) | Pressão (Bar) | Peso (Kg) | A1 | A2 | A3 | B | Min. E H7 | Max. E H7 | G1 | G2 | H | N1 | N2 | N3 | U1 | U2 |
|---------|-----------------------|-------------------|-----------------|---------------|-----------|------|-------|----|-----|-----------|-----------|-----|----|----|------|----|------|----|------|
| 01 | 260 | 180 | 2700 | 5,5 | 9 | 188 | 72 | - | 58 | 25 | 35 | 0,3 | 41 | 6 | 250 | - | 282 | 14 | 10 |
| 02 | 550 | 350 | 2000 | 5,5 | 13 | 236 | 88,5 | - | 66 | 25 | 45 | 0,3 | 48 | 6 | 410 | - | 442 | 14 | 12 |
| 03 | 900 | 500 | 1500 | 5,5 | 35 | 305 | 122 | - | 90 | 30 | 70 | 0,3 | 21 | 10 | 390 | - | 450 | 22 | 18 |
| 04 | 1000 | 570 | 1500 | 5,5 | 30 | 304 | 140 | - | 84 | 35 | 65 | 0,3 | 23 | 10 | 388 | - | 444 | 22 | 19,8 |
| 05 | 1900 | 1200 | 1200 | 5,5 | 50 | 380 | 130 | - | 100 | 40 | 80 | 0,5 | 28 | 14 | 495 | - | 560 | 30 | 26 |
| 06 | 2000 | 1000 | 1300 | 5,5 | 55 | 393 | 140 | - | 100 | 40 | 80 | 0,4 | 26 | 12 | 495 | - | 575 | 30 | 26 |
| 07 | 4000 | 1900 | 1000 | 5,5 | 102 | 460 | 190 | - | 135 | 45 | 105 | 0,4 | 32 | 13 | 610 | - | 690 | 40 | 36 |
| 08 | 6000 | 2600 | 1000 | 5,5 | 150 | 530 | 205 | - | 145 | 55 | 125 | 0,5 | 37 | 16 | 645 | - | 746 | 40 | 36 |
| 09 | 9500 | 5600 | 900 | 5,5 | 235 | 600 | 205 | - | 155 | 70 | 125 | 0,6 | 42 | 16 | 770 | - | 870 | 45 | 40 |
| 10 | 17000 | 8000 | 750 | 5,5 | 320 | 700 | 270 | - | 180 | 80 | 145 | 0,8 | 47 | 18 | 880 | - | 980 | 55 | 50 |
| 11 | 21000 | 10000 | 600 | 5,5 | 450 | 800 | 310 | - | 210 | 100 | 160 | 1,0 | 55 | 23 | 970 | - | 1080 | 55 | 50 |
| 12 | 40000 | 22000 | 500 | 5,5 | 800 | 1015 | 381,5 | - | 295 | 115 | 200 | 2,0 | 85 | 31 | 1300 | - | 1460 | 75 | 50 |

Chaveta DIN 6885 | DIN 6886 | DIN 6887

SÉRIE TIPO TAMANHO MONTAGEM

WEFI/CT – 06 – M2

