
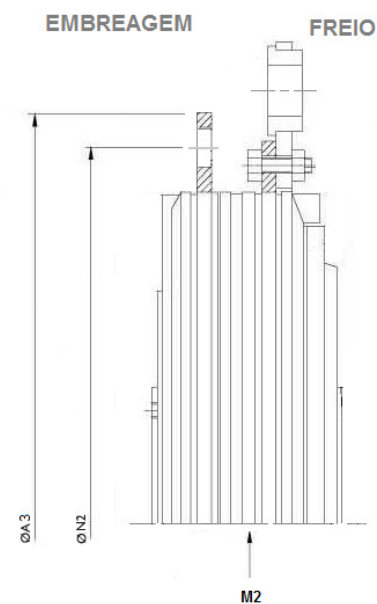
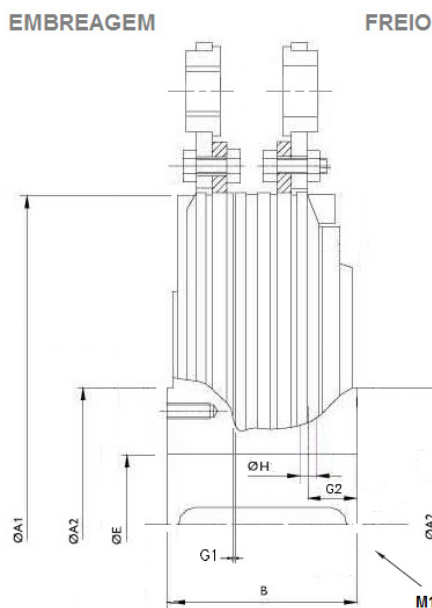


EMBREGEM E FREIO –

SÉRIE WEFI / HT CONJUGADO PNEUMÁTICO

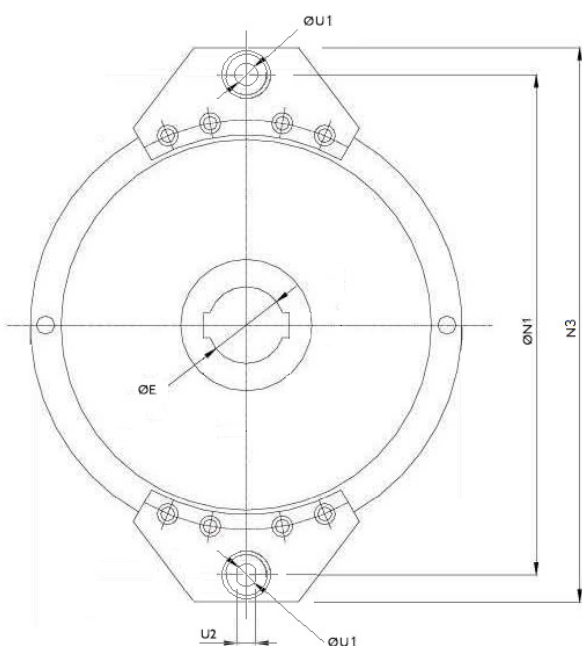

Tamanho	Torque Embreagem (Nm)	Torque Freio (Nm)	Rot. Max. (RPM)	Pressão (Bar)	Peso (Kg)	A1	A2	A3	B	Min. E H7	Max. E H7	G1	G2	H	N1	N2	N3	U1	U2
21	5000	3150	1200	5,5	95	466	177	-	125	50	110	1,0	34	16	610	-	695	40	36
22	6100	4300	1200	5,5	110	465	200	-	140	75	125	1,0	42,5	17	610	-	695	45	36
23	7200	4100	1100	5,5	130	497	185	-	140	60	115	1,0	37,5	18	645	-	730	40	30
24	9700	5000	1000	5,5	170	543	248	-	160	80	145	1,5	38	18	695	-	785	45	40
25	11500	6100	900	5,5	185	593	275	-	160	90	160	1,5	42,5	18	770	-	870	45	40
26	20000	9100	800	5,5	285	675	310	-	205	100	180	1,5	47	21	880	-	1000	55	50
27	36000	24000	700	5,5	675	830	350	-	248	125	200	2,0	60	25	1100	-	1260	75	65
28	66000	27000	500	5,5	1100	1000	430	-	315	150	240	2,5	105	32	1500	-	1900	95	90

Chaveta DIN 6885 | DIN 6886 | DIN 6887

SERIE TIPO TAMANHO MONTAGEM

WEFI/HT – 26 – M2

