

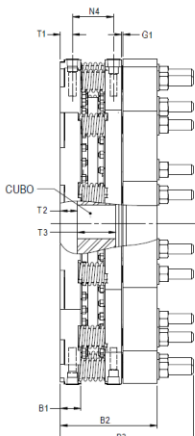
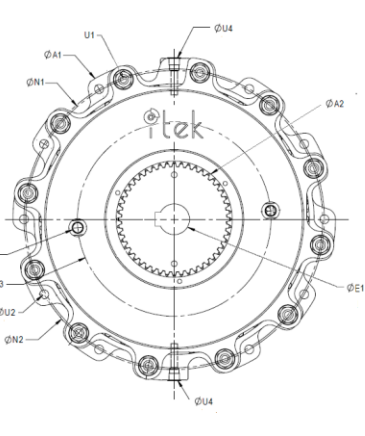


FREIO PNEUMÁTICO DE BAIXA INÉRCIA SLIM


SÉRIE PWBI / KKBS COM REFRIGERAÇÃO POR ÁGUA




CONJUNTO COM 1 DISCO
1XX

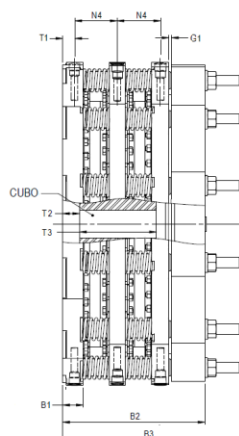

CONJUNTO COM 2 DISCOS
2XX

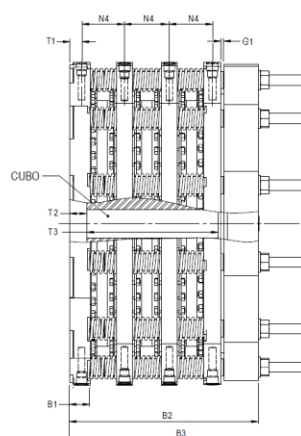

CONJUNTO COM 3 DISCOS
3XX

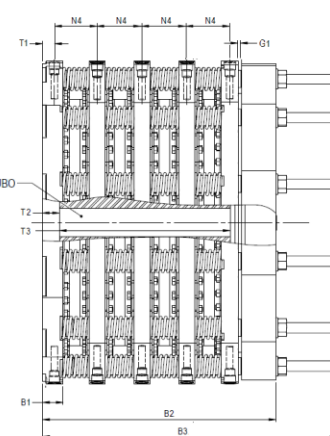

CONJUNTO COM 4 DISCOS
4XX

Tamanho	Torque Est. c/ 5 bar (Nm)	Rot. Max. (RPM)	Dissip. Térmica (kW)	Vazão da Água (L/min)	Peso (Kg)	A1	A2	B1	B2	B3	Min. E1 H7	Max. E1 H7	G1	N1	N2	N3	N4	U1	U2	U3	U4	T1	T2	T3
106	300	1.000	7	3	18	240	158	22	110	140	19	45	-	-	215	140	55	-	4 x Ø9	2 x 1/2"NPT	2 x 1/2"NPT	10	19	32
206	600	1.000	9	6	27	240	158	22	110	140	19	45	-	-	215	140	55	-	4 x Ø9	2 x 1/2"NPT	2 x 1/2"NPT	10	33	32
108	500	750	10	5	32	283	118	25	130	160	32	57	-	-	258	170	70	-	4 x Ø14	2 x 1/2"NPT	2 x 1/2"NPT	12,5	29	55
208	1.000	750	14	10	46	283	118	25	130	160	32	57	-	-	258	170	70	-	4 x Ø14	2 x 1/2"NPT	2 x 1/2"NPT	12,5	29	55
118	5.000	850	89,5	45,5	150	600	216	38	184	247	57	135	-	-	559	360	82	-	10 x Ø17	2 x 1/2"NPT	2 x 1/2"NPT	22	32	71,5
218	10.000	850	179	91	209	600	216	38	269	334	57	135	-	-	559	360	82	-	10 x Ø17	2 x 1/2"NPT	2 x 1/2"NPT	22	32	143
318	15.000	850	268,5	136	385	600	216	38	354	438	57	135	-	-	559	360	82	-	10 x Ø17	2 x 1/2"NPT	2 x 1/2"NPT	22	32	244,5
418	20.000	850	358	182	560	600	216	38	439	546	57	135	-	-	559	360	82	-	10 x Ø17	2 x 1/2"NPT	2 x 1/2"NPT	22	32	317,5
124	12.000	640	201	102	367	778	292	44,5	235	279,5	70	178	-	-	730	470	105	-	10 x Ø17	2 x 1/2"NPT	2 x 3/4"NPT	27	35	89
224	24.000	640	403	204	550	778	292	44,5	338	394	70	178	-	-	730	470	105	-	10 x Ø17	2 x 1/2"NPT	2 x 3/4"NPT	27	35	219
324	36.000	640	604	306	740	778	292	44,5	440,5	609,5	70	178	-	-	730	470	105	-	10 x Ø17	2 x 1/2"NPT	2 x 3/4"NPT	27	35	335
424	48.000	640	805	408	885	778	292	44,5	544,5	775	70	178	-	-	730	470	105	-	10 x Ø17	2 x 1/2"NPT	2 x 3/4"NPT	27	35	430
136	40.000	425	485	246	1.220	1.140	419	66	306	432	101	257	-	-	1.067	711	126	-	124x Ø27	3 x 1/2"NPT	2 x 1.1/4"NPT	39	60	127
236	80.000	425	969	492	1.780	1.140	419	66	432,5	527	101	257	-	-	1.067	711	126	-	124x Ø27	3 x 1/2"NPT	2 x 1.1/4"NPT	39	60	228,5
336	120.000	425	1.454	738	2.450	1.140	419	66	559	698,5	101	257	-	-	1.067	711	126	-	124x Ø27	3 x 1/2"NPT	2 x 1.1/4"NPT	39	60	330
436	160.000	425	1.939	984	2.950	1.140	419	66	685	889	101	257	-	-	1.067	711	126	-	124x Ø27	3 x 1/2"NPT	2 x 1.1/4"NPT	39	60	457

Chaveta DIN 6885 | DIN 6886 | DIN 6887

SERIE TIPO TAMANHO
PWBI/KKBS – 206

RESERVAMOS-NOS O DIREITO DE ALTERAR AS MEDIDAS SEM AVISO PRÉVIO

FEV 19



Parceiro Comercial
Speedy Usinagem
R. Radames Nardine 146
Mauá, SP

1: +55 (11) 96176-0956
e: info@itekbr.com
www.itekbr.com

